

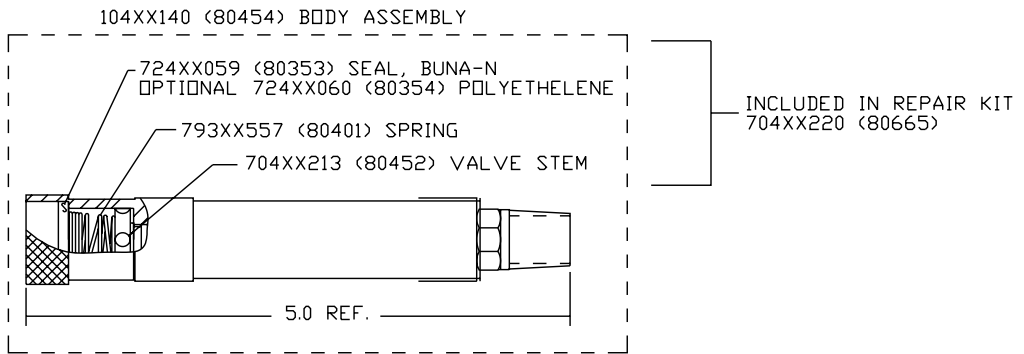


FULCRUM LEVER VALVES

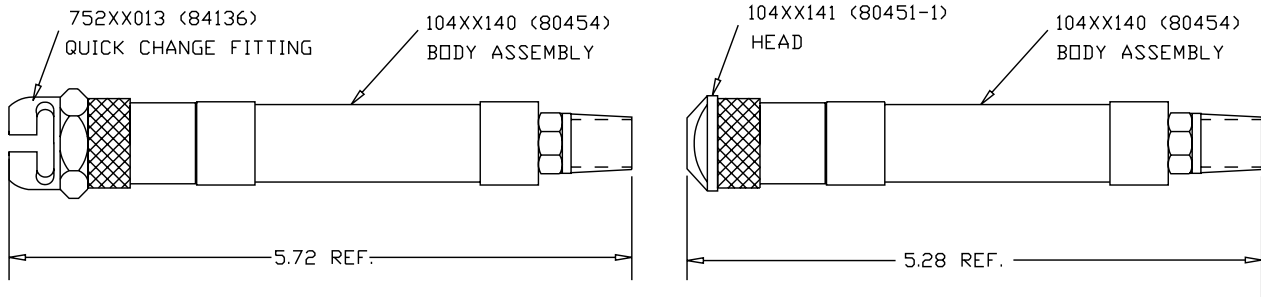

- | |
|--|
| 752XX019 (84137) BODY |
| 745XX981 (80355-1) SEAL, POLYETHELENE |
| 745XX980 (80355) SEAL, THIOKOL -- OPTIONAL |

For use with dispensing tips without built-in valves. With the tip in a dispensing position pressing the tip against the work surface flexes the body and opens the valve. The valve allows the glue to flow. Releasing the pressure on the tip permits the spring-loaded body to straighten and close the valve. May be used with any valve actuated tip.

- **Maximum working pressure: 100 P.S.I. (6.9 bar)**

SEE NEXT PAGE FOR ASSEMBLY PART NUMBERS

FULCRUM LEVER VALVES - continued

OVS p/n	ARO p/n	
724xx055	407101	FULCRUM LEVER VALVE - 3/8-24 UNF material outlet
724xx056	407102	FULCRUM LEVER VALVE-Same valve as the 407101 above except that it includes a Quick Change fitting on the material outlet. This accepts tips with quick change fittings.

724xx058	84295-1	FULCRUM LEVER VALVE HANDLE-For applications where little or no surface pressure should be used. This handle permits the body of a FULCRUM LEVER VALVE to be flexed, thus allowing the valve to operate. Has 3/8 inch diameter opening in handle. Use with the 407101 FULCRUM LEVER VALVE.
----------	---------	---